

Crystal Unit 2,5 x 2,0 mm

Features

- Small size ceramic package with high reliability using Au-Sn alloy for hermetic sealing
- Excellent shock and vibration performance, wide frequency range, high mechanical shock resistance
- Suitable for NFC, Bluetooth, WLAN and Cellular Phones
- Products are supplied on tape and reel, ROHS conform


Specifications

SQ-2520		
Frequency	16 - 60 MHz	
Load capacitance (CL)	5 pF – 20 pF, series	
Frequency tolerance (@25°C)	± 10 ppm ... ± 50 ppm	
Frequency stability	± 5 ppm ... ± 30 ppm	
Operating temperature range	-35°C - +85°C	
ESR	40 - 80 Ω max.	
Dimension	2.5 x 2.0 x 0.45 mm	

- Please consult us for customized specifications.

Dimension 2.5 x 2.0 x 0.45 mm

■ Outline

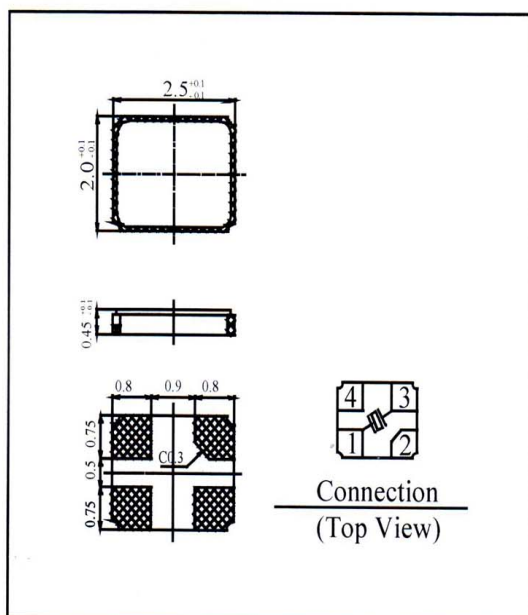

■ Reference Land Pattern

