

Crystal Unit 3,2 x 2,5 mm

Low Frequency

Features

- Small size ceramic package with reduced height (0.70 mm ± 0.05mm)
- Hermetic Sealing by Au-Sn method, **Frequency starting from ~ 9.0 MHz**
- Suitable for NFC, Bluetooth, OA and AV
- Products are supplied on tape and reel, ROHS conform


Specifications

SQ-3225 (LF)		
FREQUENCY	9 - 13 MHZ	
LOAD CAPACITANCE (CL)	8 PF – 20 PF	
Frequency tolerance (@25°C)	± 10 ppm ... ± 20 ppm	
Frequency stability	± 10 ppm +/- 15 ppm	
Operating temperature range	-35°C - +85°C	
ESR	100 - 200 Ω max. (9 – 12 MHz) 50 - 100 Ω max. (12 – 13 MHz)	
Dimension	3.2 x 2.5 x 0.70 mm	

- Please consult us for customized specifications.

Dimension

■ Outline

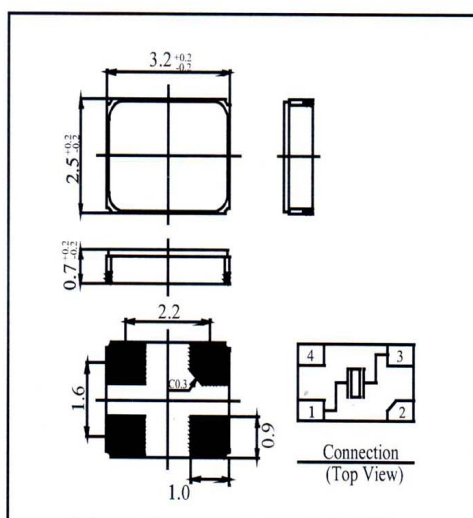

■ Reference Land Pattern

