

Crystal Unit 3,2 x 2,5 mm

Low Height

Features

- Small size ceramic package with reduced height (0.55 mm ± 0.05mm)
- Hermetic Sealing by Au-Sn method
- Suitable for NFC, Bluetooth, WLAN and Cellular Phones
- Products are supplied on tape and reel, ROHS conform


Specifications

SQ-3225 (LH)		
Frequency	13 - 70 MHz	
Load capacitance (CL)	5 pF – 30 pF, or series	
Frequency tolerance (@25°C)	± 10 ppm ... ± 50 ppm	
Frequency stability	± 5 ppm ... ± 30 ppm	
Operating temperature range	-35°C - +85°C	
ESR	80 Ω max.	
Dimension	3.2 x 2.5 x 0.55 mm	

- Please consult us for customized specifications.

Dimension

■ Outline

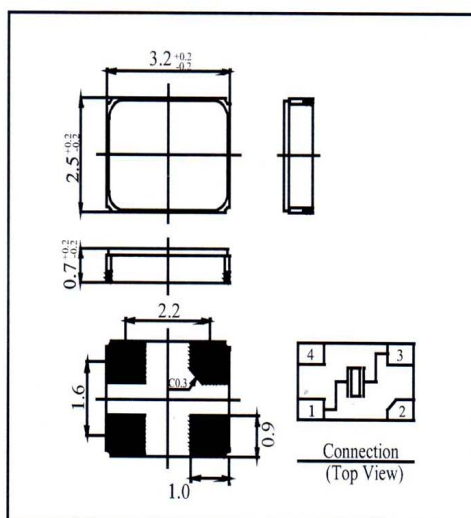

■ Reference Land Pattern

